



Norcros SA: Finishes - walls & floors

- ❖ [Go to Specifile](#)
- ❖ [Click here to view supplier details](#)
- ❖ [See full brochure](#)

TAL BOND®



DESCRIPTION

TAL BOND is a latex based additive for cementitious powder adhesives and grouts and is used to improve water resistance, flexibility and bond strength of the powder product. This system is particularly useful when tiling in:

- Swimming pools and permanently wet locations
- Coldrooms and areas where temperature changes are experienced
- Exterior, exposed conditions
- High traffic areas
- Flexible backgrounds

DIRECTIONS

Replace the water in the mix with TAL BOND. The following ratios apply:

- 5 litres to 20kg TAL PROFESSIONAL, TAL GOLDSTAR 2, TAL GOLDSTAR 6
- 5.5 litres to 20kg TAL MARBLEFIX
- 7.5 litres to 20kg TAL MOSAICFIX
- 8 litres to 20kg TAL SCAPER WHITE WALL GROUT
- 6 litres to 20kg TAL WALL & FLOOR GROUT
- 5 litres to 20kg TAL QUARRYGROUT

STORAGE AND SHELF LIFE

When stored under cover between 5°C and 30°C, the product has a shelf life of 6 months.

PACKAGING

Available in 20L, 5L and 1L bottles, and in a 200L drum.

WARNING

DO NOT INGEST • USE ONLY AS DIRECTED • WEAR PROTECTIVE GLOVES AND GOGGLES • WORK IN A WELL VENTILATED AREA.

TAL GUARANTEE

TAL products are manufactured to the highest standards and are guaranteed to be free from manufacturing defects and fit for design purpose. TAL products must be used strictly in accordance with TAL's methods and materials specifications and good working practice.

TAL TECHNICAL ADVISORY SERVICE

For a detailed methods and materials specification contact the TAL TECHNICAL ADVICE CENTRE on our toll free line on 0800 008 008 or fax (011) 316 3127.

Solutions Through Technology



Another successful installation guaranteed

A **MEMBER** COMPANY



DESCRIPTION

TAL BOND is a latex based additive for cementitious powder adhesives and grouts and is used to improve water resistance, flexibility and bond strength of the powder product. This system is particularly useful when tiling in:

- Swimming pools and permanently wet locations
- Coldrooms and areas where temperature changes are experienced
- Exterior, exposed conditions
- High traffic areas
- Flexible backgrounds

DIRECTIONS

Replace the water in the mix with TAL BOND. The following ratios apply:

5 litres to 20kg TAL PROFESSIONAL, TAL GOLDSTAR 2, TAL GOLDSTAR 6
5.5 litres to 20kg TAL MARBLEFIX
7.5 litres to 20kg TAL MOSAICFIX
8 litres to 20kg TAL SUPER WHITE WALL GROUT
6 litres to 20kg TAL WALL & FLOOR GROUT
5 litres to 20kg TAL QUARRYGROUT

STORAGE AND SHELF LIFE

When stored under cover between 5°C and 30°C, the product has a shelf life of 6 months.

PACKAGING

Available in 20ℓ, 5ℓ and 1ℓ bottles, and in a 200ℓ drum.

WARNING


DO NOT INGEST • USE ONLY AS DIRECTED • WEAR PROTECTIVE GLOVES AND GOGGLES • WORK IN A WELL VENTILATED AREA.

TAL GUARANTEE

TAL products are manufactured to the highest standards and are guaranteed to be free from manufacturing defects and fit for design purpose. TAL products must be used strictly in accordance with TAL's methods and materials specifications and good working practice.

TAL TECHNICAL ADVISORY SERVICE

For a detailed methods and materials specification contact the TAL TECHNICAL ADVICE CENTRE on our toll free line on 0800 008 008 or fax (011) 316 3127.

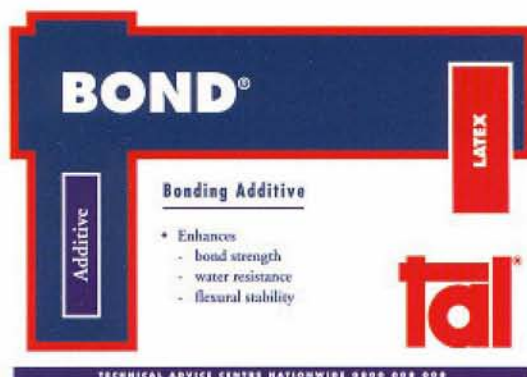

Another successful installation guaranteed

A **NORCROS** COMPANY



TAL BOND®

PRECAUTIONS

Wear gloves. Avoid inhalation, eye and skin contact. In the event of contamination, rinse freely with cold water. Seek medical assistance if irritation or discomfort persists.

Please contact TAL (Pty) Ltd for any further technical information required.

IMPORTANT NOTICE

The obligation of TAL (Pty) Ltd shall be to replace any of this product proved to be defective in any way.

CONTACT DETAILS

Toll free Technical helpline 0800 008 008

Johannesburg: (011) 316 3133 • Cape Town (021) 386 1810 • Durban (031) 700 1535

TAL reserves the right to change the information on this datasheet.

Another successful installation guaranteed