



Norcros SA: TAL floorkey

- ❖ [Go to Specifile](#)
- ❖ [Click here to view supplier details](#)
- ❖ [See full brochure](#)

TAL FLOORKEY®



DESCRIPTION

TAL FLOORKEY is a modified latex liquid primer to be used on smooth, dense and impervious surfaces, ensuring a good bond onto the substrate. TAL FLOORKEY is compatible with TAL SUPERSCREED and TAL SCREEDMASTER. It is also used as a primer prior to the application of TAL SUPERFLEX and TAL SUREPROOF waterproofing compounds.

SURFACE PREPARATION

The surface must be structurally sound, clean and dry and free from shutter release and curing agents, laitance and surface contamination such as dust, dirt, waxes, oils, old adhesives, paint, grease, sealants, weak cement screeds and renders, etc. Bituminous compounds must be removed completely. New concrete or screeds must be at least 28 days old, and new renders or brickwork must be at least 14 days old.

APPLICATION

TAL FLOORKEY can be applied by brush or roller. Prime smooth, dense and impervious surfaces (ie powerfloated concrete, existing tiles) with a slurry consisting of 1 part TAL FLOORKEY mixed with 2 parts cement (by volume), which is brushed onto the floor.

TAL Superscreed, TAL Superflex & TAL Sureproof

The TAL FLOORKEY slurry coat must be allowed to dry completely before the waterproofing application is commenced.

TAL Screedmaster

Allow the TAL FLOORKEY slurry to dry completely before applying a coat of TAL FLOOR PRIMER prior to the TAL SCREEDMASTER application. TAL SCREEDMASTER must be applied when the FLOOR PRIMER coat is touch dry.

COVERAGE

Coverage varies depending on the surface porosity, but is usually approximately 5m²/lit.

PACKAGING

TAL FLOORKEY is available in 25l bottles and 200l returnable drums.

STORAGE & SHELF LIFE

When stored in dry internal conditions between 5°C and 30°C and out of direct sunlight the product has a shelf life of 6 months from date of manufacture. Never store directly on a concrete floor.

WARNING


DO NOT INGEST. USE ONLY AS DIRECTED. PROTECT SENSITIVE SKIN WITH RUBBER GLOVES.

TAL GUARANTEE

TAL products are manufactured and tested to TAL procedures, which are maintained in accordance with Quality System Standard ISO 9001 - 2000. TAL products are guaranteed to be free from manufacturing defects and fit for design purposes. TAL guarantees the performance of its products when used to its capacity in accordance with TAL's materials and methods specifications and good working practice.

TAL TECHNICAL ADVICE CENTRE

For a detailed Materials and Methods Specification contact the TAL Technical Advice Centre on 0860 000 TAL(825) or e-mail taltech@norcros.com. Branches - Johannesburg (011) 316-3132; Cape (021) 386-1810; Natal (031) 700-1535



TECHNICAL ADVICE CENTRE NATIONWIDE 0860 000 TAL(825)

Solutions Through Technology

DESCRIPTION

TAL FLOORKEY is a modified latex liquid primer to be used on **smooth, dense and impervious surfaces**, ensuring a good bond onto the substrate. TAL FLOORKEY is compatible with TAL SUPERSCREED and TAL SCREEDMASTER. It is also used as a primer prior to the application of TAL SUPERFLEX and TAL SUREPROOF waterproofing compounds.

SURFACE PREPARATION

The surface must be structurally sound, clean and dry and free from shutter release and curing agents, laitance and surface contamination such as dust, dirt, waxes, oils, old adhesives, paint, grease, sealants, weak cement screeds and renders, etc. Bituminous compounds must be removed completely. New concrete or screeds must be at least 28 days old, and new renders or brickwork must be at least 14 days old.

APPLICATION

TAL FLOORKEY can be applied by brush or roller. Prime smooth, dense and impervious surfaces (ie powerfloated concrete, existing tiles) with a slurry consisting of 1 part TAL FLOORKEY mixed with 2 parts cement (by volume), which is brushed onto the floor.

TAL Superscreed, TAL Superflex & TAL Sureproof

The TAL FLOORKEY slurry coat must be allowed to dry completely before the waterproofing application is commenced.

TAL Screedmaster

Allow the TAL FLOORKEY slurry to dry completely before applying a coat of TAL FLOOR PRIMER prior to the TAL SCREEDMASTER application. TAL SCREEDMASTER must be applied when the FLOOR PRIMER coat is touch dry.

COVERAGE

Coverage varies depending on the surface porosity, but is usually approximately 5m²/ℓ.

PACKAGING

TAL FLOORKEY is available in 25ℓ bottles and 200ℓ returnable drums.

STORAGE & SHELF LIFE

When stored in dry internal conditions between 5°C and 30°C and out of direct sunlight the product has a shelf life of 6 months from date of manufacture. Never store directly on a concrete floor.

WARNING


DO NOT INGEST. USE ONLY AS DIRECTED. PROTECT SENSITIVE SKIN WITH RUBBER GLOVES.

TAL GUARANTEE

TAL products are manufactured and tested to TAL procedures, which are maintained in accordance with Quality System Standard ISO 9001 : 2000. TAL products are guaranteed to be free from manufacturing defects and fit for design purposes. TAL guarantees the performance of its products when used strictly in accordance with TAL's materials and methods specifications and good working practice.

TAL TECHNICAL ADVICE CENTRE

For a detailed Materials and Methods Specification contact the TAL Technical Advice Centre on 0860 000 TAL(825), or e-mail taltech@norcrossa.com. Branches : Johannesburg (011) 316-3133; Cape (021) 386-1810; Natal (031) 700-1535

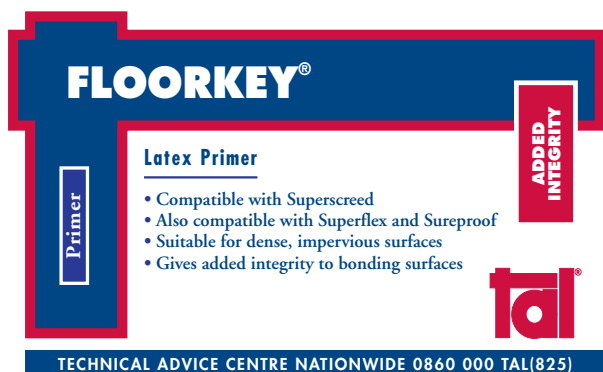

FLOORKEY®

Primer

ADDED INTEGRITY

Latex Primer

- Compatible with Superscreed
- Also compatible with Superflex and Sureproof
- Suitable for dense, impervious surfaces
- Gives added integrity to bonding surfaces

tal®

TECHNICAL ADVICE CENTRE NATIONWIDE 0860 000 TAL(825)

Another successful installation guaranteed

A **NORCROS** COMPANY



TAL FLOORKEY®

PRECAUTIONS

Contact TAL (Pty) Ltd for further health and safety information. Dispose of this product in accordance with local regulations.

IMPORTANT NOTICE

TAL believes the information on this sheet to be correct – but does not guarantee its accuracy or completeness. Conduct your own tests of this product to determine its suitability for intended use. User assumes all risks and liability during testing and use of this product. The only obligation of TAL shall be to replace any of this product proved to be defective in material. TAL shall not be liable for any injury, loss or damage, direct or consequential, relating to the use or inability to use this product. Except as expressly provided above, all products sold and samples furnished without any warranty of merchantability or any other warranty, express or implied. TAL (Pty) Ltd reserves the right to change the information on this datasheet.

Another successful installation guaranteed

